
PUBLIC ADDRESS / ATTENUATORS / LOW IMPEDANCE

DOT-100M

LOW IMPEDANCE MONO ATTENUATOR









- For 4-8 ? low Z speakers
- For universal standard case
- 10 position ergonomic potentiometer with switch off
- Minimalist aesthetic

+ Info:
https://fonestar.com/DOT-100M

ESPECIALLY RECOMMENDED IN:


Hospitality


Offices


Hotels


All sectors


DESCRIPTION


Low impedance mono attenuator. Flush or surface mounting.


TECHNICAL CHARACTERISTICS


FEATURES	Low impedance mono transformer attenuator for recessed or surface mounting. The transformer provides better sound quality and volume control accuracy.
POWER	100 W maximum
OUTPUTS	Low Z for 4-8 Ohm speakers
CONTROLS	10 dimming and off positions
DIMENSIONS	Total: 83 x 83 x 50 mm depth Insert: 50 x 50 x 45 mm depth
WEIGHT	0.2 kg
	For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX. Distance between screws: 60 mm


+ Info:
https://fonestar.com/DOT-100M

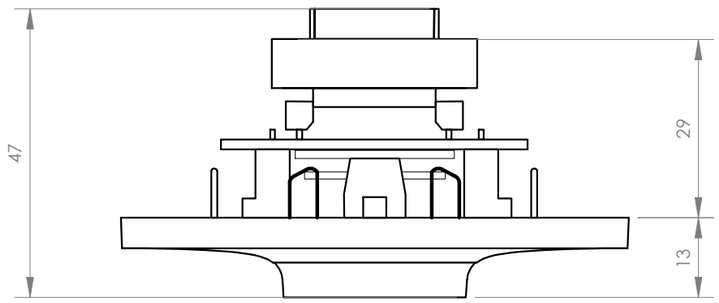

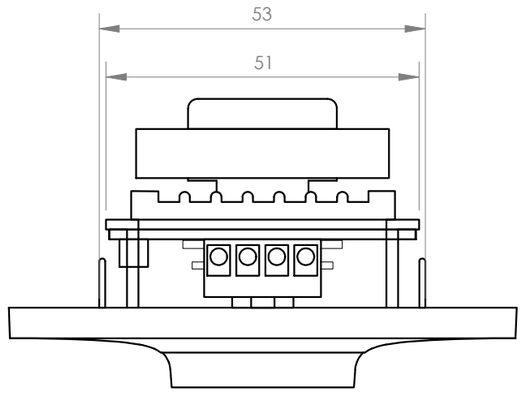

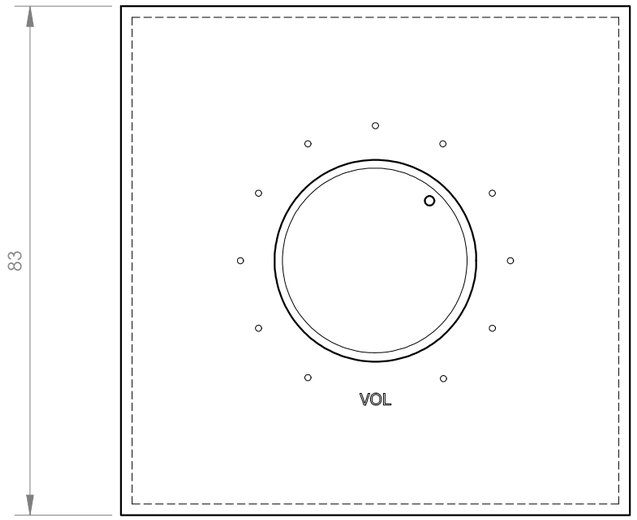

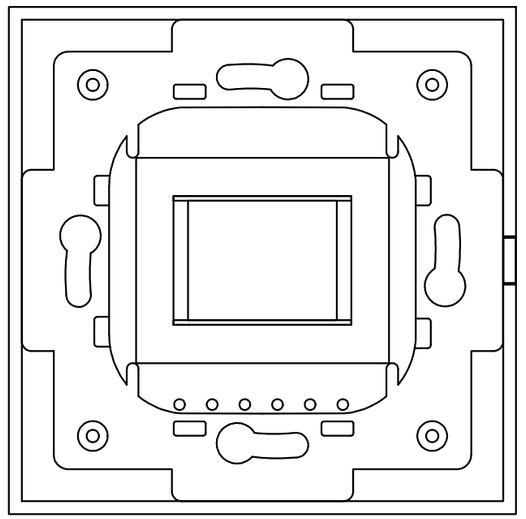

FONESTAR	Model	Description	Units	Scale
	DOT-100M	LOW IMPEDANCE MONO ATTENUATOR	mm	1:1