

PUBLIC ADDRESS / ATTENUATORS / 100 V LINE

DOT-100TR

100 V LINE ATTENUATOR



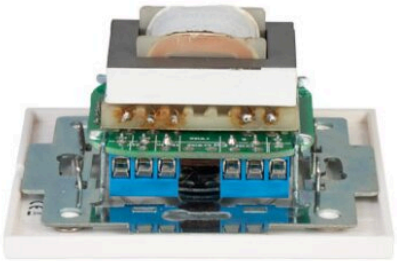

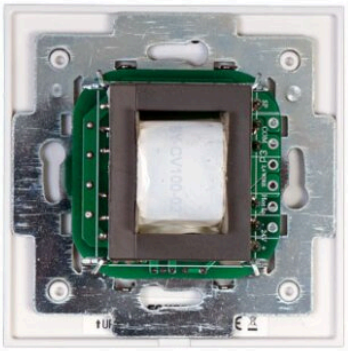



- For 100 V line installations
- Priority by 3 or 4 wires with relay
- For universal standard case
- 10 position ergonomic potentiometer with switch off
- Minimalist aesthetic

+ Info:
https://fonestar.com/DOT-100TR

ESPECIALLY RECOMMENDED IN:



Hospitality



Offices



Hotels



All sectors

DESCRIPTION


100 V line attenuator. 2-wire input and 3 and 4 wire priority input (24 V). Flush or surface mounting.


TECHNICAL CHARACTERISTICS


FEATURES	100 V line attenuator with autotransformer for flush or surface mounting. 2-wire input and 3- and 4-wire priority systems.
POWER	100 W maximum
INPUTS	High Z 100 V line
OUTPUTS	High Z 100 V line
CONTROLS	10 attenuation positions and off switch
RELAY	24 V, 200 mW, 8 mA.
DIMENSIONS	Total: 83 x 83 x 50 mm depth Insert: 50 x 50 x 38 mm depth
WEIGHT	0.2 kg
	For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX. Distance between screws: 60 mm




+ Info:
https://fonestar.com/DOT-100TR

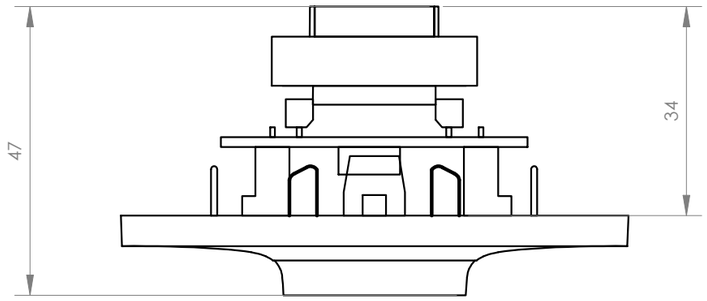

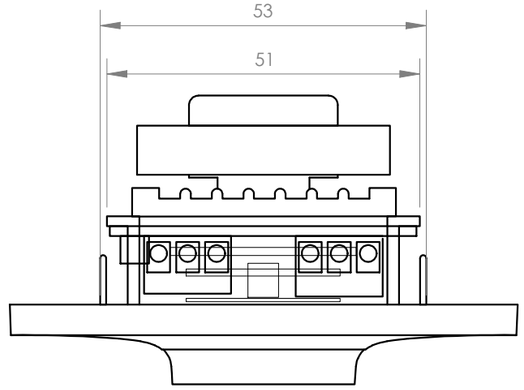

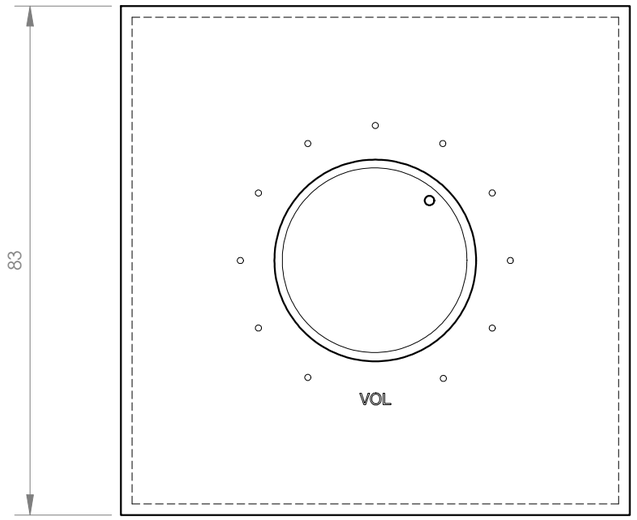

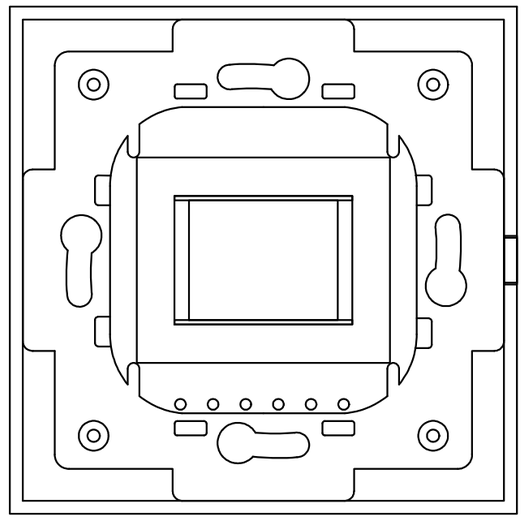

	Model	Description	Units	Scale
FONESTAR	DOT-100TR	100 V LINE ATTENUATOR	mm	1:1