

PUBLIC ADDRESS / ATTENUATORS / LOW IMPEDANCE

DOT-10M

LOW IMPEDANCE MONO ATTENUATOR



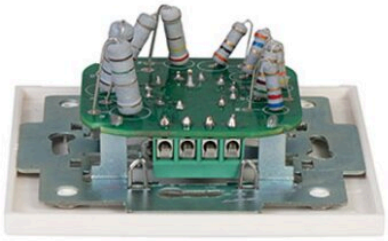





- For 4-8 ? low Z speakers
- For universal standard case
- 6 position ergonomic potentiometer with switch off
- Minimalist aesthetic

+ Info:
https://fonestar.com/DOT-10M

ESPECIALLY RECOMMENDED IN:


Hospitality


Offices


Hotels


All sectors


DESCRIPTION


Low impedance mono attenuator. Flush or surface mounting.


TECHNICAL CHARACTERISTICS


FEATURES	Mono low-impedance transformer attenuator for flush or surface mounting. The transformer provides higher sound quality and greater accuracy in volume control.
POWER	10 W maximum
OUTPUTS	Low Z for 4-8 Ohm speakers
CONTROLS	10-position potentiometer with off switch.
PROTECTION	IP-44
DIMENSIONS	Total: 83 x 83 x 33 mm depth Insert: 50 x 50 x 21 mm depth
WEIGHT	0.1 kg
	For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX. Distance between screws: 60 mm


+ Info:
https://fonestar.com/DOT-10M

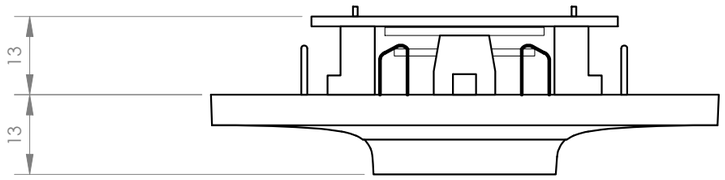

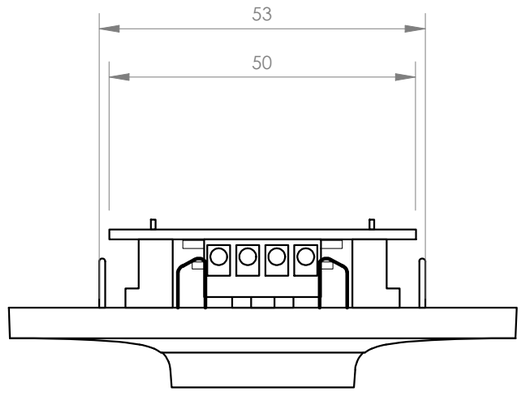

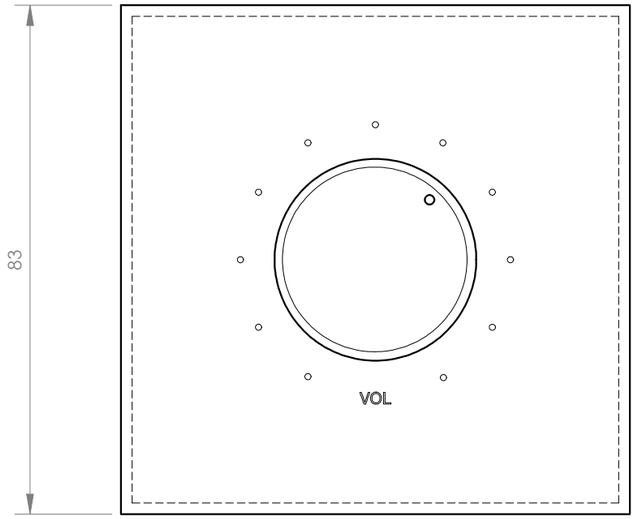

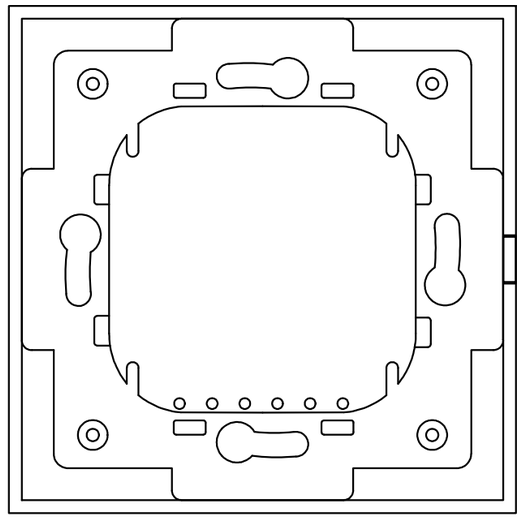

FONESTAR	Model DOT-10M	Description LOW IMPEDANCE MONO ATTENUATOR	Units mm	Scale 1:1