PUBLIC ADDRESS / ATTENUATORS / 100 V LINE

# DOT-12TR

100 V LINE ATTENUATOR









- 100 V line
- Priority by 3 or 4 wires with relay
- For universal standard case
- 10 position ergonomic potentiometer with switch off
- Minimalist aesthetic

+ Info:
https://fonestar.com/DOT-12TR

ESPECIALLY RECOMMENDED IN:



Hospitality



Offices



Hotels



All sectors

## DESCRIPTION

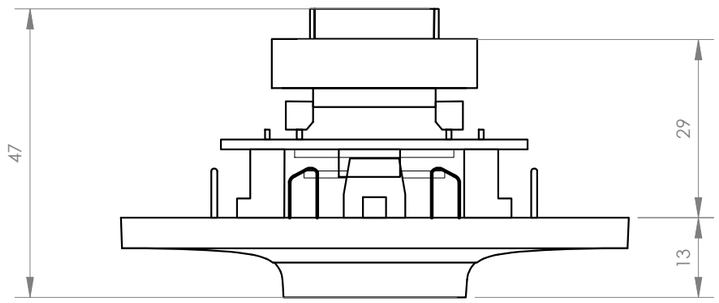
100 V line attenuator. 2-wire input and 3 and 4 wire priority input (24 V). Flush or surface mounting.

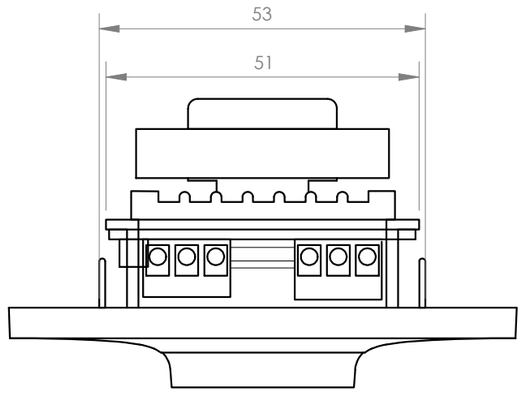
## TECHNICAL CHARACTERISTICS

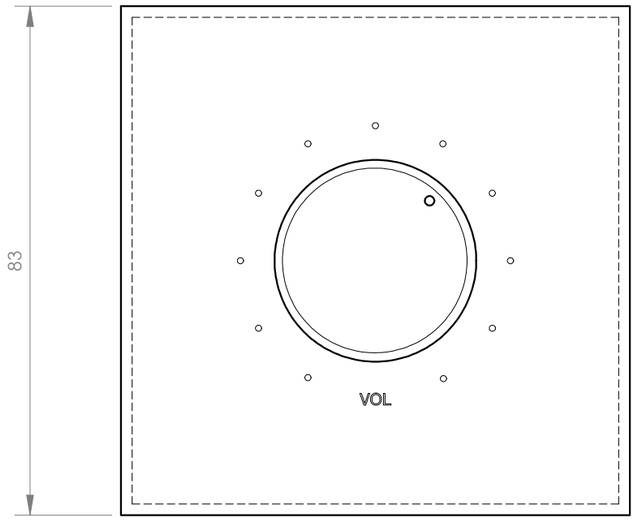
| | |
|---|---|
| FEATURES | 100 V line attenuator with autotransformer for recessed or surface mounting<br>2-wire input and 3- and 4-wire priority systems (24 V). |
| POWER | 12 W maximum |
| INPUTS | High Z 100 V line |
| OUTPUTS | High Z 100 V line |
| CONTROLS | 10 attenuation positions and off switch |
| RELAY | 24 V, 200 mW, 8 mA. |
| DIMENSIONS | Total: 83 x 83 x 50 mm depth<br>Insert: 50 x 50 x 38 mm depth |
| WEIGHT | 0.15 kg |
| | For standard universal square box, round for plasterboard partitions and for surface installation box mod. DOT-BOX.<br>Distance between screws: 60 mm |

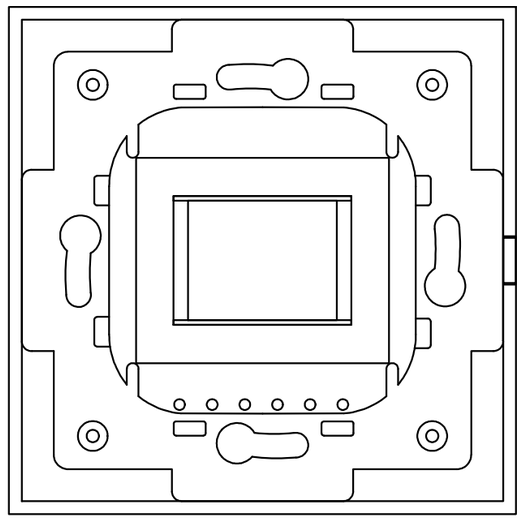


+ Info:
https://fonestar.com/DOT-12TR



| FONESTAR | Model | Description | Units | Scale |
|---|---|---|---|---|
| | DOT-12TR | 100 V LINE ATTENUATOR | mm | 1:1 |