SYSTEMS AND CONTROL / ZONE SYSTEMS / DIGITAL

# MIC-DANTE

DANTE DESKTOP MICROPHONE



- Crystal clear voice pick-up
- Configurable talk button ON-OFF/PTT/PTM
- Digital audio transmission via DANTE

+ Info:
https://fonestar.com/MIC-DANTE

ESPECIALLY RECOMMENDED IN:



Sports facilities



Hotels



All sectors

## DESCRIPTION

DANTE digital audio desktop microphone

## TECHNICAL CHARACTERISTICS


| | |
|---|---|
| CAPSULE | Unidirectional cardioid electret condenser<br>(without preamplifier circuit) |
| RESPONSE | 80-16,000 Hz |
| SENSITIVITY | -35 dB (V/Pa) at 1 KHz |
| IMPEDANCE | 600 Ohm |
| SPL MAX | 115 dB |
| EQUIVALENT NOISE | 33 dB |
| DYNAMIC RANGE | 82 dB |
| DISTORTION (THD) | <1 % |
| SNR | 61 dB |
| CLIPPING LEVEL | - 6 dBV |
| SWITCH | Mic: 3 positions ON-OFF/PTT/PTM |
| INDICATORS | LED power indicator<br>LED operation ring |
| CONNECTORS | Input: 1 x unbalanced microphone, XLR 600 Ohm.<br>Output: 1 x LAN port (DANTE) for connection to local area network, RJ-45 |
| TEMPERATURE | Operating temperature: -20 ºC - 50 ºC<br>Storage temperature: -25 ºC - 70 ºC<br>Relative humidity: 0 - 90 % |
| POWER SUPPLY | POE (IEE 802.3af standard)<br>XLR 1.5 to 9 V DC |
| DIMENSIONS | Microphone with gooseneck: 45 cm high<br>Base: 93 x 46 x 122 mm depth |
| WEIGHT | 0.6 kg |
| ACCESSORIES | Wind-shield foam |



+ Info:
https://fonestar.com/MIC-DANTE

# MIC-DANTE

MICRÓFONO DE SOBREMESA DANTE

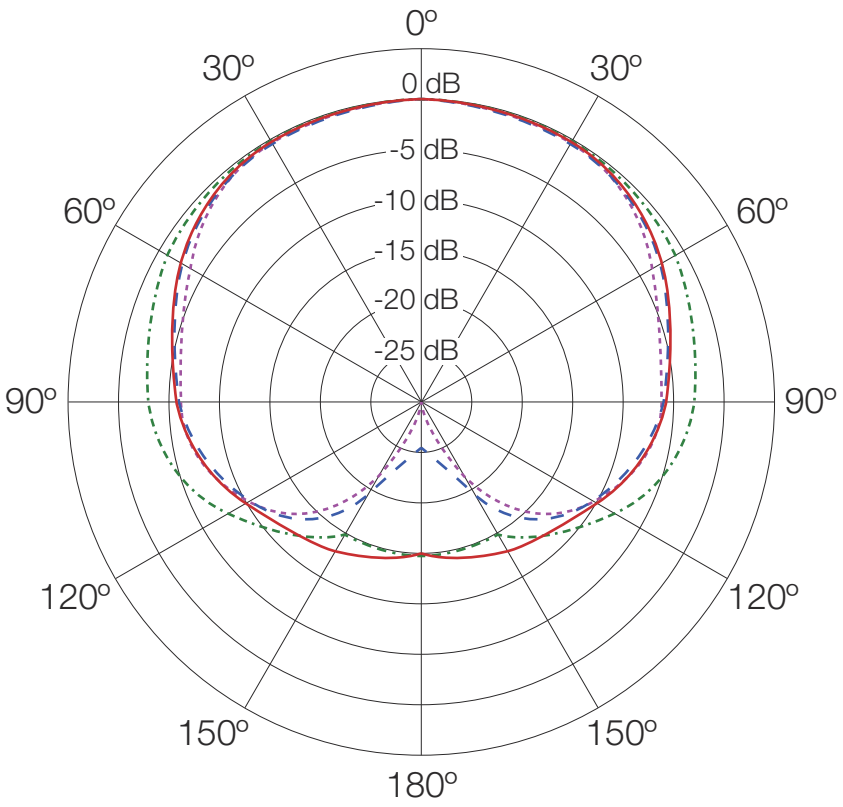


4000 Hz
2000 Hz
1000 Hz
500 Hz

**Ángulo de cobertura -6 dB:**

| | |
|---|---|
| 500 Hz | 210º |
| 1000 Hz | 180º |
| 2000 Hz | 180º |
| 4000 Hz | 160º |

+ Info:
https://fonestar.com/MIC-DANTE