SYSTEMS AND CONTROL / ZONE SYSTEMS / ANALOGUE

ZONE-6

6-ZONE OUTPUT SWITCHING UNIT



UP TO 4 ZONEMIC-6 · 6 ZONES · LIGHT INDICATORS · ATTENUATORS PRIORITY BY CONTACT CLOSURE

- Transform your installation from independent zones to a zone system.
- Zone contact closures for activation of attenuators or connection to alarm systems
- Easy to install and operate zone system

+ Info:
https://fonestar.com/ZONE-6

ESPECIALLY RECOMMENDED IN:



Factories



Education



Social and health centers



Hotels

DESCRIPTION


6-zone output switching unit. Connection with ZONEMIC-6 paging microphone. Audio output and contact closure for each output.


TECHNICAL CHARACTERISTICS


FEATURES	6-zone output switching unit. Connection to the ZONEMIC-6 paging microphone, connection of up to 4 microphones. Possibility of activating the priority in attenuators by contact closure when giving warnings from the ZONEMIC-6 microphone. Status indicator lights for each zone.
INPUTS	1 ZONEMIC-6 microphone with zone selector and recorded messages, RJ45
OUTPUTS	6 x balanced lines, euroblock 500 mV
POWER SUPPLY	230 V AC 50/60 Hz, 2.9 W
DIMENSIONS	262 x 44 x 128 mm depth
WEIGHT	1 kg
OPTIONAL	ZONEMIC-6: Zone microphone with recorded messages



+ Info:
https://fonestar.com/ZONE-6

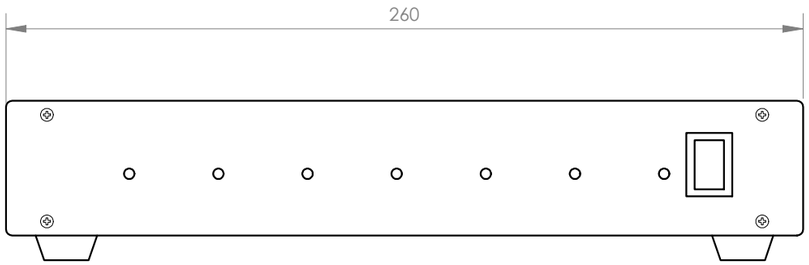

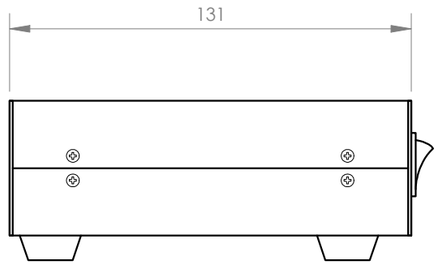

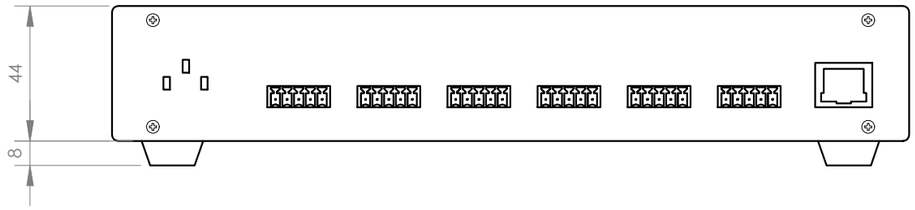

	Model	Description	Units	Scale
FONESTAR	ZONE-6	ZONEMIC-6_AUTOCAD_20231110	mm	1:2