MICROPHONE / INTERCOMMUNICATION / WINDOW

INTERFON-V

WINDOW INTERCOM





- Anti-feedback.
- Input for micro-headphones
- Window and interior mute button

+ Info:
https://fonestar.com/INTERFON-V

ESPECIALLY RECOMMENDED IN:



Retail



Social and health centers



Transport Stations



All sectors

DESCRIPTION

Window intercom. Bidirectional. Anti-feedback.


TECHNICAL CHARACTERISTICS

FEATURES	Window intercom. Two-way sound.
FUNCTIONS	Automatic control of communication, internal intercom priority Anti-feedback LED operation indicator lights on the desktop intercom Optimal speaking distance to the window intercom microphone 20 cm Headset input The window intercom can be hung or attached to the glass with the supplied double-sided stickers.
POWER	2 x 5 W maximum
CONTROLS	On/off Independent window and interior volume Window and interior mute button
INPUTS	1 x window intercom, 3.5 mm 4-pin jack 1 x headset micro headset, 3.5 mm 4-pin jack 1 x line, 3.5 mm stereo jack for playback through window intercom
OUTPUTS	1 REC, 3.5 mm 3-pin jack
POWER SUPPLY	12 V DC, 1 A with adapter included
DIMENSIONS	Desktop intercom: 105 x 60 x 139 mm depth Gooseneck microphone: 396 mm height Window intercom: 87 x 109 x 35 mm depth
WEIGHT	0.6 kg
ACCESSORIES	2.5 m window intercom cable, 4-pin 3.5 mm jack plug. Windshield foam Double-sided adhesive for window intercom installation





+ Info:
https://fonestar.com/INTERFON-V


Block diagram

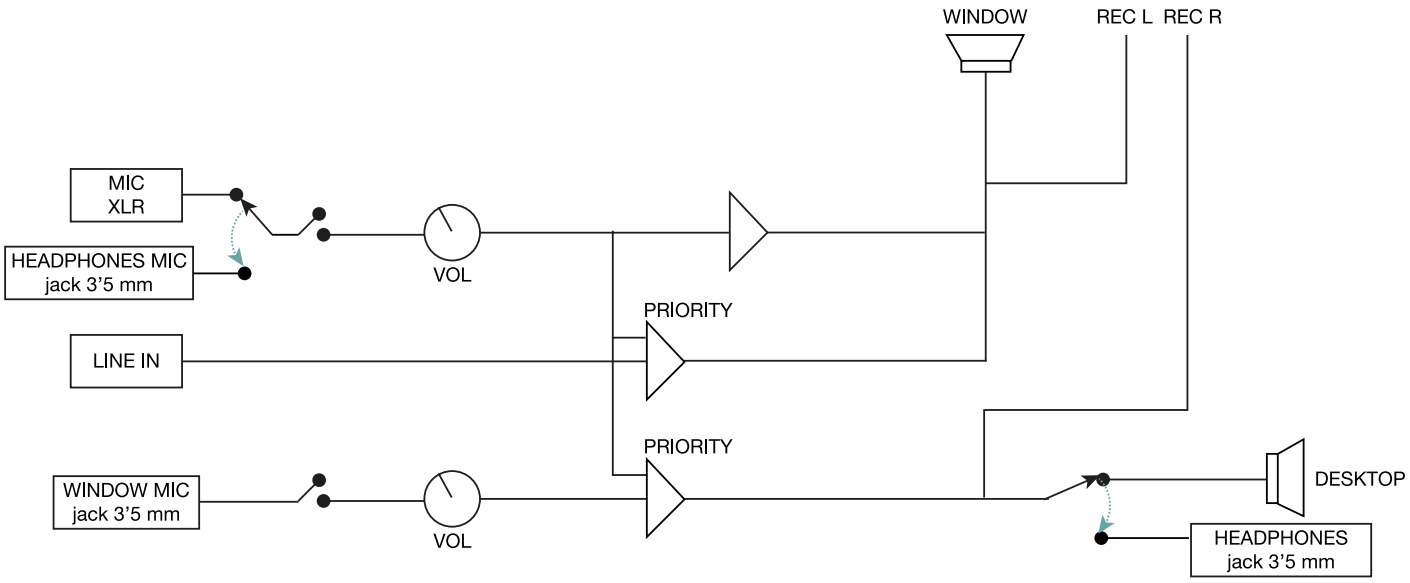



+ Info
https://fonestar.com/INTERFON-V

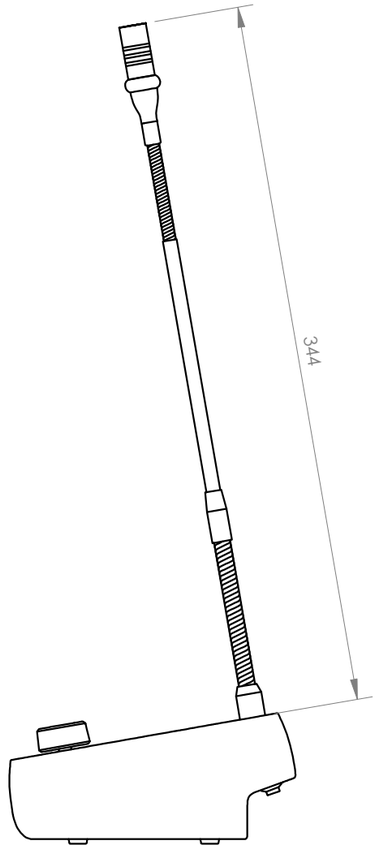


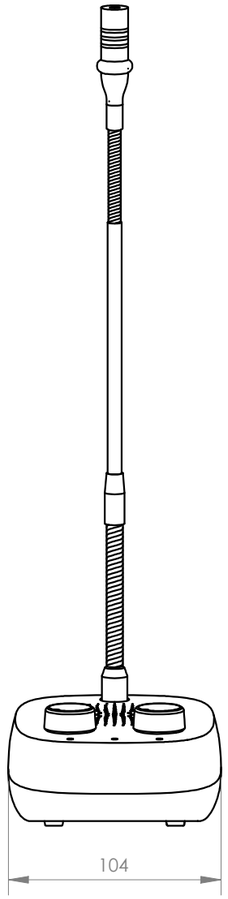


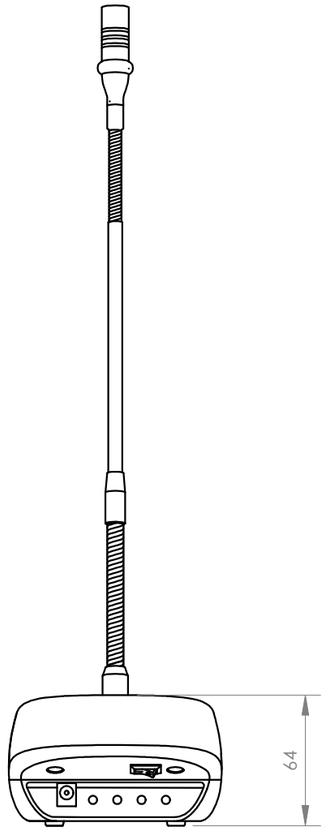









FONESTAR	Model	Description	Units	Scale
	INTERFON-V	WINDOW INTERCOM	mm	1:3