PUBLIC ADDRESS / PLAYERS / AUDIO

MIXPLAY-1

BLUETOOTH®/USB/FM PLAYER WITH RECORDER AND MIXER FUNCTION.



RADIO BLUETOOTH USB REC

- Player, recorder and mixer in one device
- Great connectivity with audio inputs/outputs
- Compact size 1 U rack 19”
- User-friendly and intuitive
- Remote control and brackets for 19" rack assembly

+ Info:
https://fonestar.com/MIXPLAY-1

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels



All sectors

DESCRIPTION

Bluetooth®/USB/FM player with microphone and music recorder and mixer function.

TECHNICAL CHARACTERISTICS

FEATURES	Bluetooth/USB/FM player. Recording function. Microphone input mixer with auxiliary or player. Microphone priority by signal level. Optical or coaxial digital audio input. Auxiliary inputs. 3 x master outputs. Stereo/mono selector for outputs. Output for active subwoofer. Bass, midrange, treble and balance control. Remote control of the player.
RESPONSE	20-20,000 Hz
DISTORSION	THD+N: < 0.1% @ 1 kHz
S/N RATIO	Mic >60 dB Aux >70 dB
INPUTS	1 x MIC balanced Micro. Combo (XLR + 6.3 mm) connector. Signal level 30 mV RMS (-30 dBV) / 600 Ohm (@ balanced and unbalanced output 1 V RMS) 2 AUX and LINE. 2 x RCA connector. Signal level: 350 mV RMS (-9 dBV) / 47K Ohm (@ balanced 1 V RMS output). Signal level: 750 mV RMS (-2.5 dBV) / 47K Ohm (@ unbalanced output 1 V RMS) 1 x digital audio (optical or coaxial). Connectors, TOSLINK and RCA. Priority of the optical input over the coaxial input
OUTPUTS	OUT 1 and OUT 2 unbalanced output. 2 x RCA connectors. Signal level: 1 V RMS (0 dBV), max. 6.5 V RMS (16 dBV) @ THD 1% / 1K5 Ohm OUT 3 balanced output. 2 x XLR connectors. Output level: 1 V RMS (0 dBV), max. 6.5 V RMS (16 dBV) @ THD 1% / 1K5 Ohm 1 x REC. 2 x RCA connectors. Signal level. 1 V RMS (0 dBV) / 1K5 Ohm 1 x Subwoofer. RCA connector. Signal level: 1 V RMS (0 dBV) / 1K5 Ohm 1 x Headphones. 6.3 mm stereo connector.





+ Info:
https://fonestar.com/MIXPLAY-1


FUNCTIONS	Microphone priority by signal level over all other inputs, level selectable Mono/stereo output selector for OUT 1, OUT 2 and OUT 3
PLAYER	Bluetooth/USB/FM player Supported MP3, WMA and WAV files USB recorder of the microphone mix and AUX or Line inputs (does not record digital audio input) USB sticks of 64 GB maximum, FAT32 and NTFS format USB flash drive autoplay, starts playback automatically in USB mode on power-up Playback mode memory (random, repeat).
CONTROLS	Microphone volume. Input selector or player Volume of AUX, LINE, DIGITAL and player inputs with balance, bass, mid and treble control Mono/stereo selector for outputs Player/recorder controls GND lift ground disconnection
POWER SUPPLY	230/115 V AC, 7 W
DIMENSIONS	433 x 45 x 155 mm depth. 1 U 19” rack
WEIGHT	1.9 kg
ACCESSORIES	Remote control of the player. FM antenna Power cable Brackets for 19" rack.
NOTE	Firmware with different Bluetooth names and password-protected firmware are available in the software section




+ Info:
https://fonestar.com/MIXPLAY-1

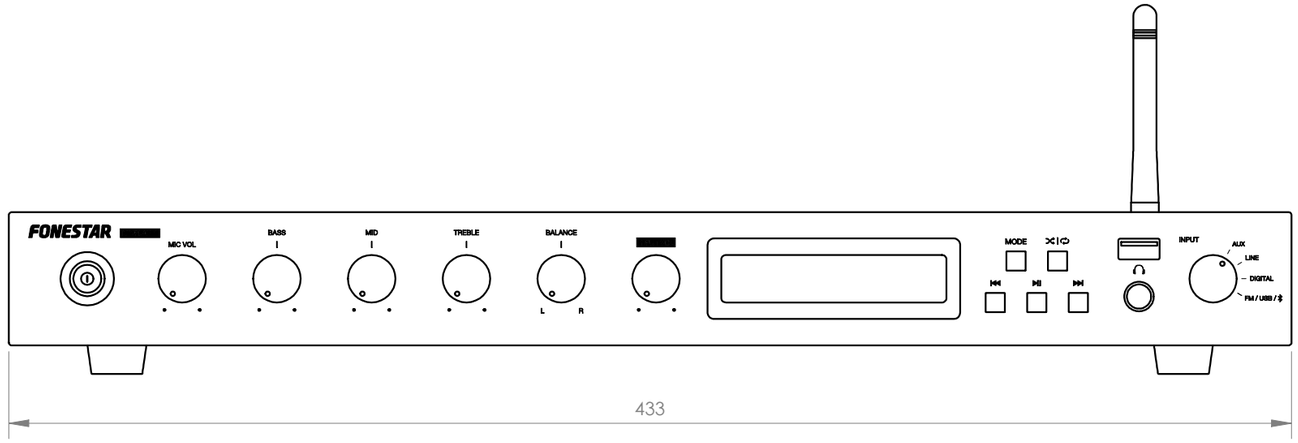

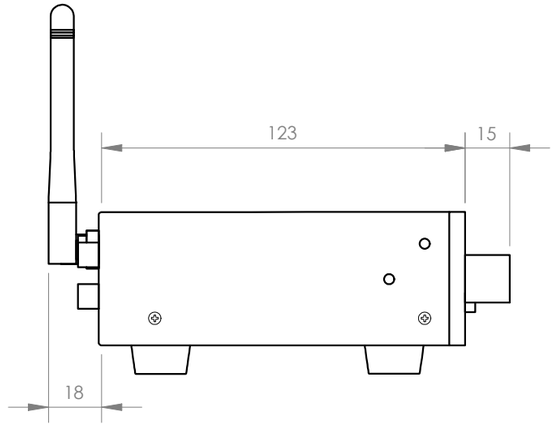

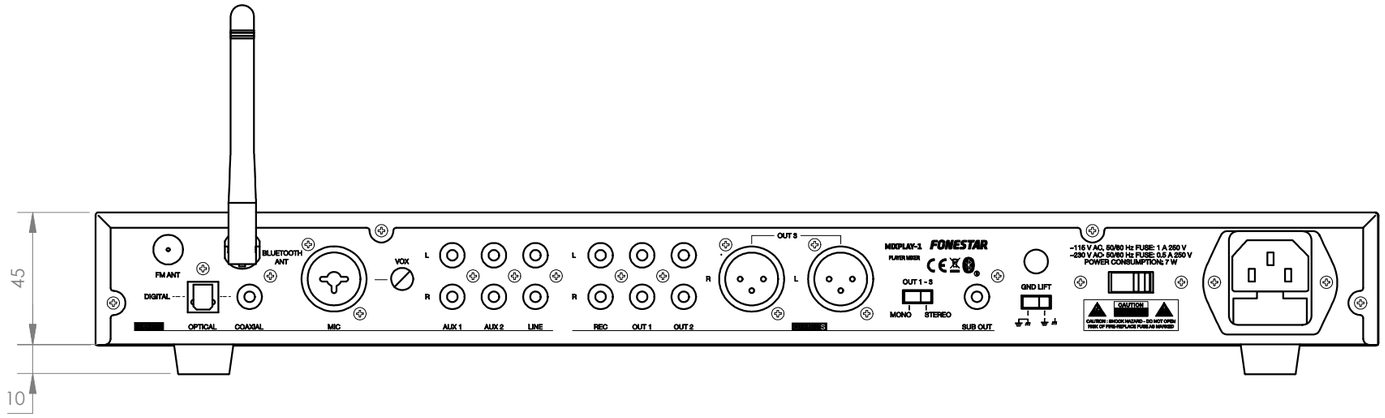



FONESTAR	Model MIXPLAY-1	Description BLUETOOTH®/USB/FM PLAYER WITH RECORDER AND MIXER FUNCTION	Units mm	Scale 1:2