SYSTEMS AND CONTROL / ZONE SYSTEMS / DIGITAL

NMX-WP

REMOTE CONTROL UNIT FOR NMX SERIES MATRICES





ETHERNET · FULL IP · SCALABLE INSTALLATIONS · CUSTOMISED CONFIGURATION · UDP · PoE

- Up to 32 programmable menus
- Simple connection via Ethernet and POE power.

+ Info:
https://fonestar.com/NMX-WP

ESPECIALLY RECOMMENDED IN:



Sports facilities



Hotels



All sectors

DESCRIPTION


Programmable remote control for NMX series audio matrix.

TECHNICAL CHARACTERISTICS

FEATURES	Programmable remote control. Neutral design with a selection button and information display. Up to 32 programmable menus. Programmable and customisable with PC control software. The main functions are volume control, gain control, Mute, scene call and UDP, RS-232 or RS-485 commands. Supports multiple controllers in one installation. Simple connection via Ethernet and PoE power. Installation in type 86 box.
CONTROLS	Selection and confirmation button UDP control protocol
INPUTS	1 x LAN port for local area network connection, RJ-45
POWER SUPPLY	PoE, consumption <300 mW
DIMENSIONS	Totals: 86 x 86 x 40.2 mm depth Inset: 47.5 x 60 x 22.5 mm depth Distance between screws: 60 mm
WEIGHT	0.2 kg
OPTIONAL	DOT-BOX-WH: surface-mounting box



+ Info:
https://fonestar.com/NMX-WP

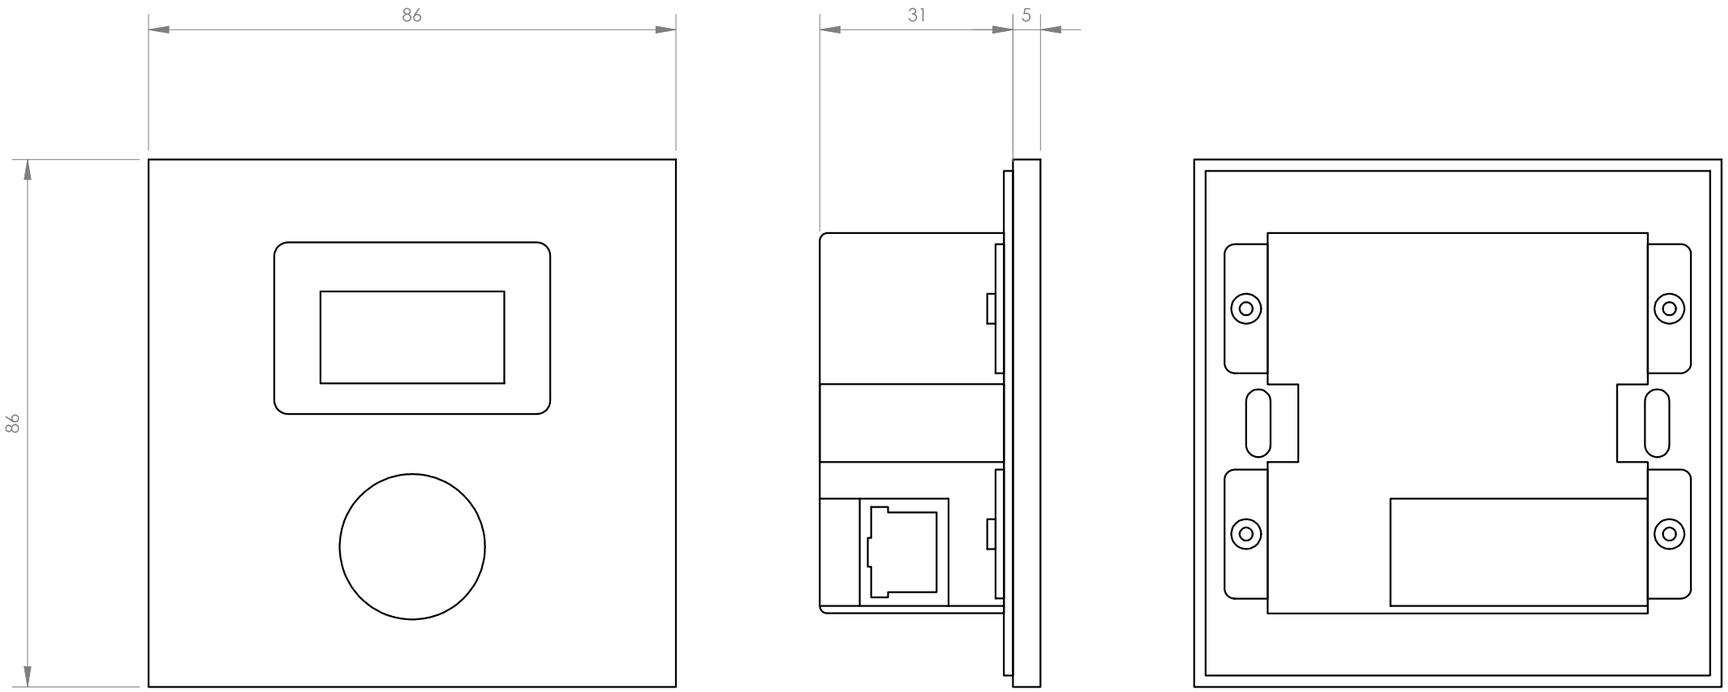

FONESTAR	Model NMX-WP	Description PROGRAMMABLE REMOTE CONTROL FOR NMX SERIES MATRIXES	Units mm	Scale 1:1