PUBLIC ADDRESS / SPEAKERS / CEILING

SKY-6-DOME

6" + 1" LOW IMPEDANCE CEILING LOUDSPEAKER





- 6' + 1' coaxial speaker. 20 W RMS@8 ?
- Protective dome type back cover
- Low profile aluminium grille
- Fast connection terminals and high conductivity. In junction box
- Anti-fall system for installation assistance

+ Info:
https://fonestar.com/SKY-6-DOME

ESPECIALLY RECOMMENDED IN:


Hospitality


Retail


Hotels


All sectors

DESCRIPTION

6' coaxial ceiling speaker with 1' tweeter and rear dome cover. 20 W RMS@8 Ohm. Low profile grille.

TECHNICAL CHARACTERISTICS


FEATURES	Low impedance ceiling loudspeaker. Protective dome type back cover. Low profile frameless grille, constructed from rust resistant aluminium. Detachable, turn-lockable grille. The logo can be removed and painted. Fast connection terminals and high conductivity. Junction box in the rear cover with inlet and outlet port. Anti-fall system for installation assistance. Hook for safety cable. Stable, worm-gear ceiling brackets. Installation in ceilings with limited space. Protection against dust and water.
POWER	20 W RMS 25 W MAX.
SPEAKER	Coaxial speaker. 6" polypropylene woofer 1" adjustable tweeter
RESPONSE	45-20,000 Hz @ -10 dB 60-20,000 Hz @ -3 dB
IMPEDANCE	8 Ohm
SENSITIVITY	90 dB @ 1 W/1 m
SOUND PRESSURE	103 dB @ max. W/1m Continuous 106 dB @ max. W/1m Peak
COVERAGE ANGLE:	H/V (-6 dB): 125°@500Hz, 150°@1kHz, 60°@2kHz, 60°@4kHz
PROTECTIONS	IP-65 in compliance with IEC 60529 EN ISO 9227:2006 Neutral Salt Spray Test
MATERIAL	ABS (UV resistant) Liquid painted aluminium grille


+ Info:
https://fonestar.com/SKY-6-DOME


CONNECTORS	Highly conductive quick-connect terminals For cable cross-section 0.4 ~ 4 mm². Junction box in back cover with inlet and outlet holes
OPERATION TEMPERATURE	-20ºC ~ 70ºC (48 h)
STORAGE TEMPERATURE	10ºC ~ 40ºC
MAXIMUM HUMIDITY	95%
COLOUR	White (RAL 9003)
DIMENSIONS	Total loudspeaker: 249 mm Ø x 95 mm height Grille section: 5 mm Recessed height: 90 mm Installation hole: 219 mm Ø Maximum ceiling thickness: 30 mm
WEIGHT	1.45 kg
ACCESSORIES	Installation template

+ Info:
https://fonestar.com/SKY-6-DOME

SPL vs Frequency

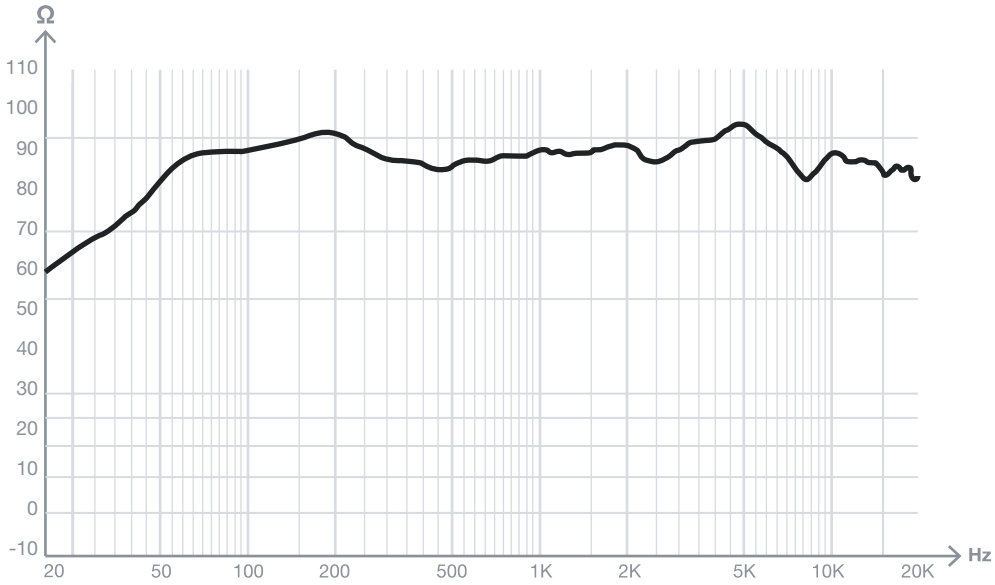


SPL vs Angle

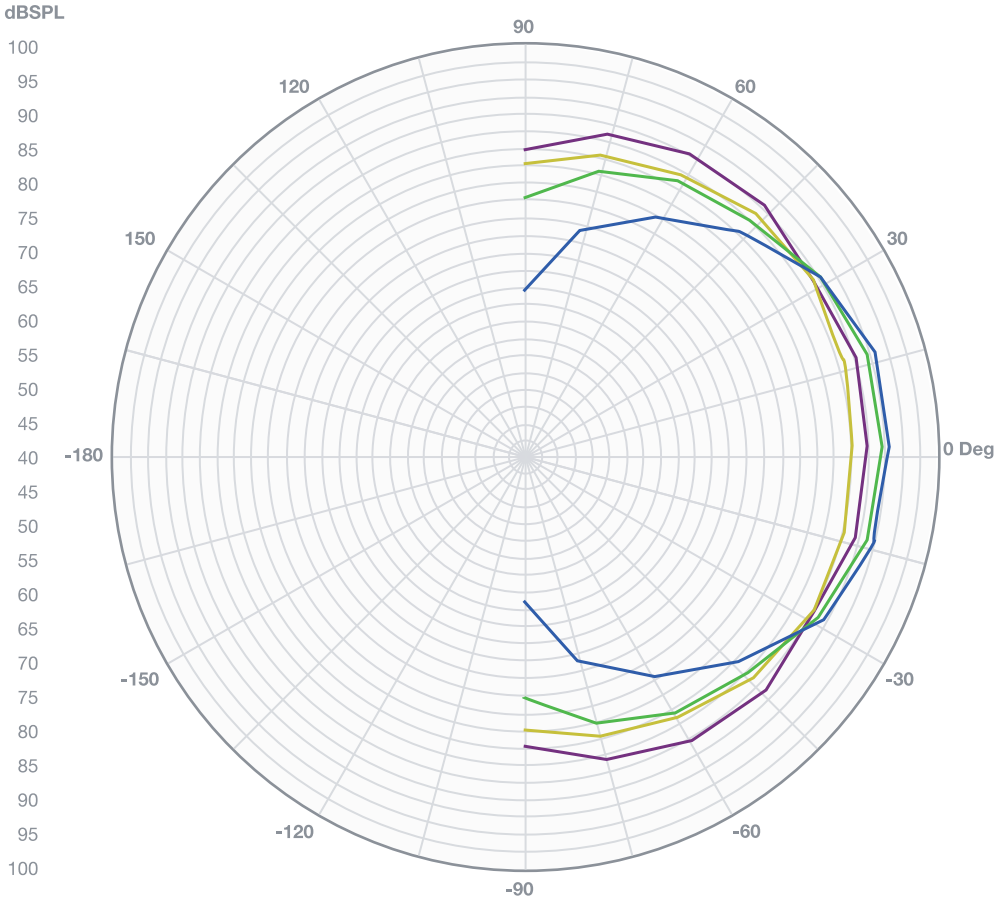

Curve	Freq.	BW	Q	DI
	500.00	150	2.4	3.8
	1.00K	150	2.4	3.8
	2,00K	90	4.0	3.8
	4.00K	60	6.0	7.8

+ Info
https://fonestar.com/SKY-6-DOME

Impedance vs Frequency

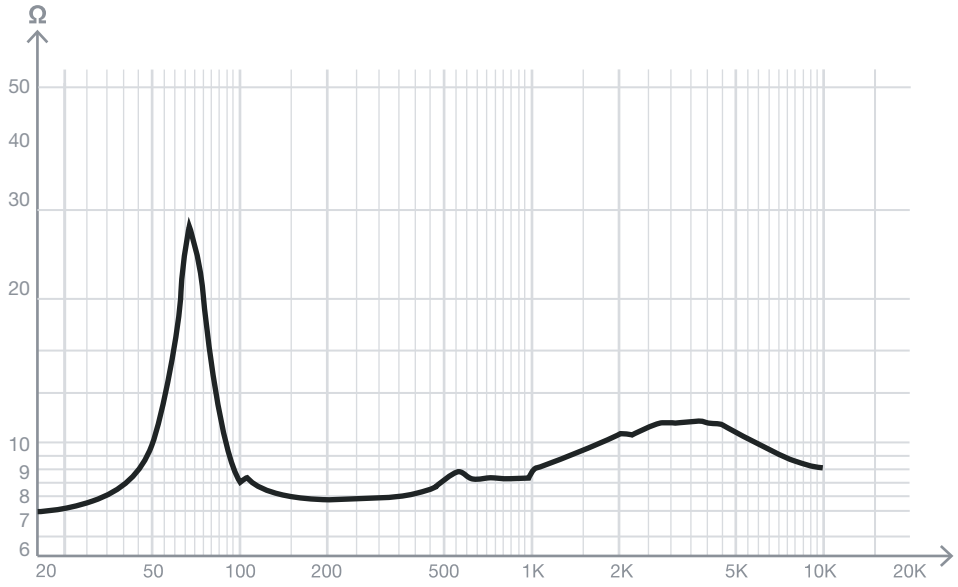

+ Info
https://fonestar.com/SKY-6-DOME