SYSTEMS AND CONTROL / ZONE SYSTEMS / DIGITAL

TAB-10-16

10" ANDROID TOUCH SCREEN TO RUN THE NMX SERIES MATRIX USER INTERFACE APP.



LAN · Micro USB · SD · 2 x USB · FULL IP · SCALABLE INSTALLATIONS · CUSTOMISED CONFIGURATION · PoE · 10'' · VESA 75x75 MOUNT

- Programmable and customizable with the PC control software.
- Connection via RJ45 Ethernet and POE power supply.
- VESA 75 x 75

+ Info:
https://fonestar.com/TAB-10-16

ESPECIALLY RECOMMENDED IN:



Sports facilities



Hotels



All sectors

DESCRIPTION


10" Android touch screen to run the NMX series matrix user interface App.


TECHNICAL CHARACTERISTICS


FEATURES	10" touchscreen based on an Android tablet 2G + 16G. To run the user interface App for NMX series matrices. Programmable and customisable with the PC control software. Main functions are volume control, Gain control, Mute, scene recall, UDP commands, RS-232 or RS-485. Supports multiple touchscreens in one installation. Connection via RJ45 Ethernet and POE power supply. Compatible with VESA 75 x 75 mount.
INPUTS	1 LAN port for connection to a local area network, RJ-45 2 USB ports 1 SD port 1 USB serial port 1 Micro USB OTG
OUTPUTS	1 x 3.5 mm Headphones with microphone
CONTROLS	Power, home, brightness adjustment and volume buttons
POWER SUPPLY	POE and 12 V DC, 1.5 A
DIMENSIONS	256 x 172 x 30 mm depth Compatible with VESA 75 x 75 mounts
WEIGHT	0.8 kg
INCLUDES	AC/DC adapter: 110 - 240 V AC / 12 V DC, 1.5 A VESA mount for wall installation



+ Info:
https://fonestar.com/TAB-10-16

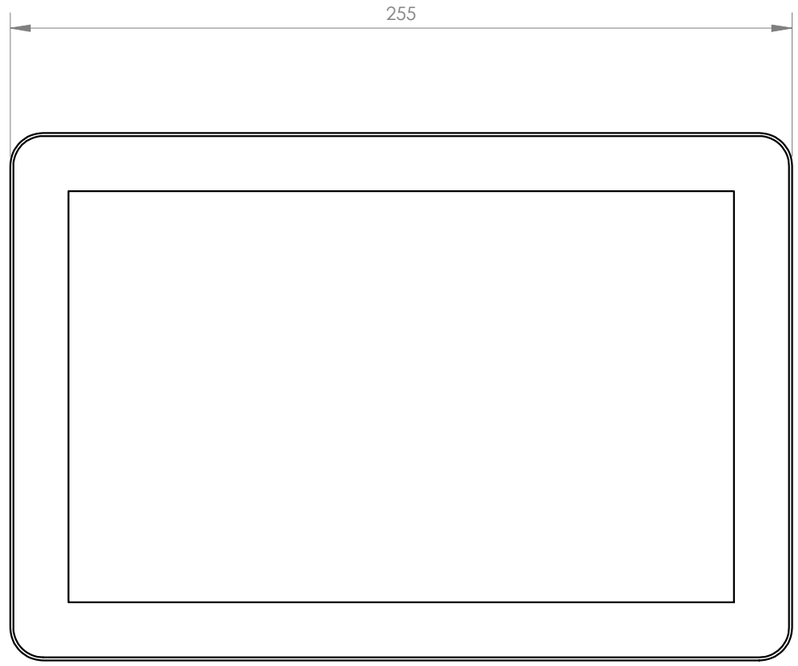

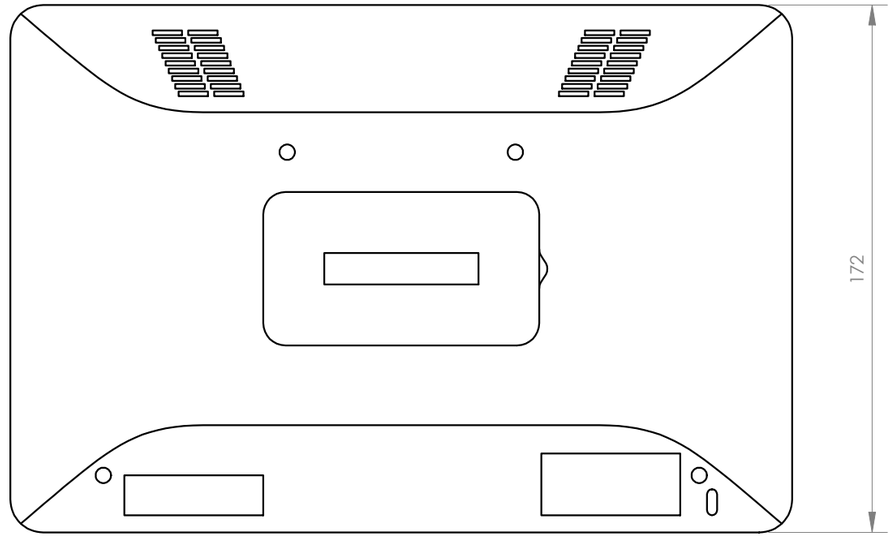

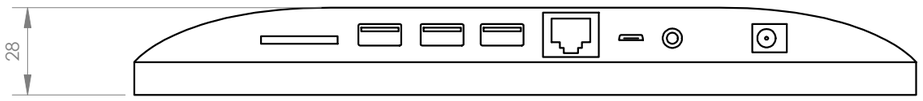

FONESTAR	Model TAB-10-16	Description 10" ANDROID TOUCH SCREEN TO RUN THE NMX SERIES USER INTERFACE APP	Units mm	Scale 1:2